

8" - FIBERGLASS CONE DRIVER - 210 mm**CLASSIC SERIES**


Woven fiberglass cone
High loss rubber surround
Large magnet (550 g)
Low resonance (29 Hz)
Smooth frequency response
Stamped steel chassis

Cône fibre de verre tissée
Suspension caoutchouc
Ferrite largement dimensionnée (100 mm)
Fréquence de résonance basse (29 Hz)
Courbe de réponse linéaire
Châssis acier embouti




The large magnet and low resonance of this 8" bass midrange make it well suited for use in compact, 2 or 3-way systems. The woven fiberglass cone is coupled with a high loss rubber surround to offer excellent sonic definition and an extended bass response. The "Suggested applications" charts indicate various driver loads, included the box alignment used to measure the response curve (Vb REF). The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp).

Ce haut-parleur de 210 mm est équipé d'un cône en fibre de verre tissée associé à une suspension en caoutchouc. Le système magnétique largement dimensionné et la fréquence de résonance basse le destinent à l'utilisation en Boomer Médium d'une enceinte compacte 2 ou 3 voies. Avec une réponse en fréquence linéaire, il offre une reproduction sonore d'une excellente définition. Le tableau "Suggested applications" indique différents types de charge dont celui utilisé pour la mesure de la courbe de réponse (Vb REF). Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Vp-Lp).

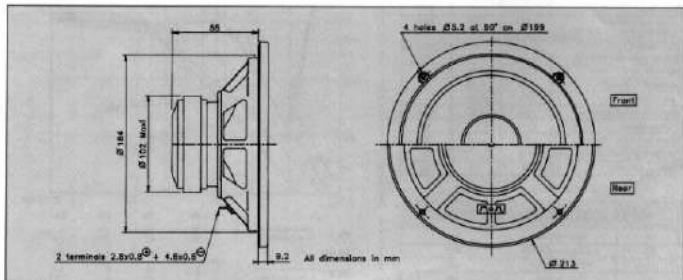

Response curve

refer to page 16

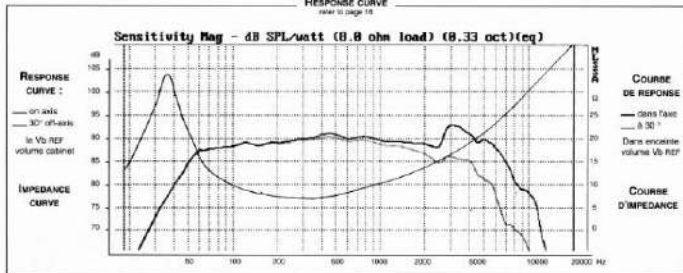

SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

PRIMARY APPLICATION

Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	34	Hz
Nominal Power Handling	P	70	W
Sensitivity	E	90	dB

VOICE COIL

Voice coil diameter	Ø	37,5	mm
Minimum Impedance	Zmin	7,6	Ω
DC Resistance	Re	6,3	Ω
Voice Coil Inductance	Lbm	0,6	mH
Voice coil Length	h	15	mm
Former	-	Aluminium	-
Number of layers	n	2	-

MAGNET


Magnet dimensions	Ø x h	100 x 16	mm
Magnet weight	m	0,55	kg
Flux density	B	1	T
Force factor	BL	9,24	NA ²
Height of magnetic gap	Hg	6	mm
Stray flux	Fmag	-	Am ²
Linear excursion	Xmax	±4,5	mm

PARAMETERS


Suspension Compliance	Cms	0,8 · 10 ⁻³	mN ⁻¹
Mechanical Q Factor	Qms	2,05	-
Electrical Q Factor	Qes	0,44	-
Total Q Factor	Qts	0,36	-
Mechanical Resistance	Rms	2,91	kg s ⁻¹
Moving Mass	Mms	27,9 · 10 ⁻³	kg
Effective Piston Area	S	2,21 · 10 ⁻¹	m ²
Volume Equivalent of Air at Cas	Vas	56 · 10 ⁻³	m ³
Mass of speaker	M	1,8	kg

APPLICATION PARAMETERS

Vb	Box volume	dm ³
Fb	Tuning frequency	Hz
Dp	Port diameter	cm
Lp	Port length	cm

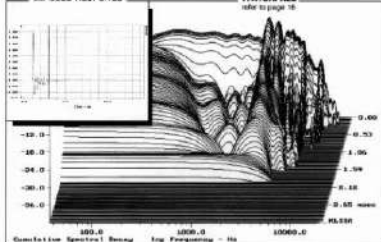IMPULSE RESPONSE
WATERFALL

SUGGESTED APPLICATIONS

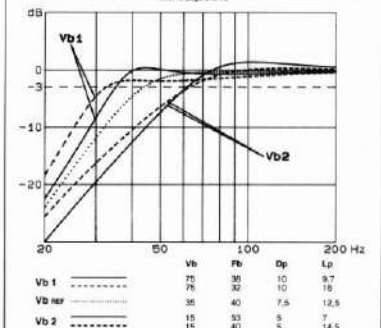refer to page 9 to 13



Please refer to method of measurement and measurement conditions pages 15 to 19.

Audax may, without prior notification, modify the specifications on its products further to research and development requirements.